

SafetyWhips.com


Mining & Industrial Safety Equipment

USA

TEL: 602.424.2520 • FAX: 602.424.9777 • Email: sales@safetywhips.com

CANADA

TEL: 604.560.5080 • FAX: 604.560.5090 • Email: lugo@safetywhips.com

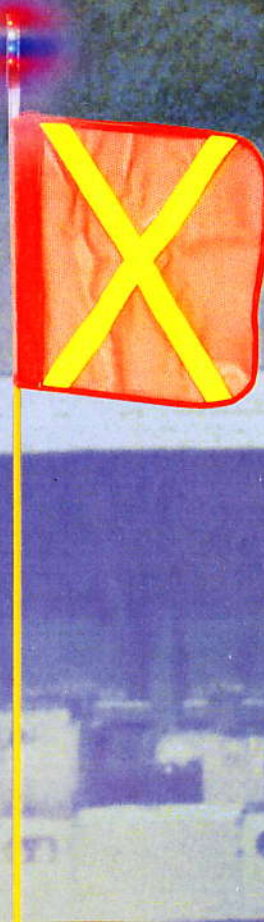

Fiberglass Whips



These whips are standard in white
To Order Colored Whips:
 Add color between Whip Length,
 and Flag Type.
 Part number example
 (8ft Red w/ X flag), would be W08-RED-X,

Super Duty Fiberglass Whips:

Part # SD6SX-8CA (6ft, Small-X flag, Amber LED Light)
 as Shown in photo at right

Added Locked-in Shielding,
 seals components top and bottom.

(See A and B photos at right.)

- 3ft to 12ft heights
- Threaded Base
- Powered
- Optional Flags
- Optional HD Spring



Solid Heavy Duty Whips

Available in

- 3ft to 12ft heights
- Threaded or Quick Release Base
- Powered or Non-Powered
- Optional Flags
- Optional Whip Color Coatings,
*Black, Red or Orange**


These whips are built for mining and industrial environments. They have proven to be the strongest and most dependable fiberglass whips available.

Shown at left

W05-Orange-X: 5' Heavy Duty Fiberglass, Whip With 1156 Type Light Socket (powered), with optional Flag Reflective X (16 x 16") and AL8FUSA LED light

Breakdown Whip:

These segmented whips can separate into two or three manageable pieces for storage in the back of the truck, or trunk toolbox. assembles quickly and maintains power to light up your whip light.



Shown at left

W14BDST-X 14' Heavy Duty 2 Piece Fiberglass Whip, With 1156 Type Light Socket, Reflective X (16 x 16") Flag. Whip length is 14' (can also be ordered for 10'-12' lengths or less)

Quick-Connect
 Whip Ends shown



Bases for Standard Fiberglass Whips

For the standard threaded pole.
519.343 Optional threaded base



For Quick-Connect Whip Ends

SSQR22, Optional RCA type (left),
 Stainless Steel, Quick-Connects base,
 designed for Spring Use

SSQR21, Optional Single Wire Lead
 Stainless Steel, Quick-Connects base (right)
 See more mount options on page on page 7

Magnet Mount with Light Duty Pole & Flag non-powered only



LW05-M

5ft Light Duty Whip
 w/Magnet Mount

LW07-M

7ft Light Duty Whip
 w/Magnet Mount (page 4 for other flags)



Extender Poles, Fiberglass Whip Extensions

Extend your current whip to satisfy site regulations.

- Standard 1, 2, 3, 4 or 6 foot lengths
- Custom sizes available
- Powered or Non-Powered
- Screw Mount or Quick Release



Screw Mount Powered	Screw Mount Non-Powered	Quick Release Powered	Quick Release Non-Powered
Part Numbers	Part Numbers	Part Numbers	Part Numbers
EXT-1	EXT-1NP	EXT-1Q	EXT-1QNP
EXT-2	EXT-2NP	EXT-2Q	EXT-2QNP
EXT-3	EXT-3NP	EXT-3Q	EXT-3QNP
EXT-4	EXT-4NP	EXT-4Q	EXT-4QNP
EXT-6	EXT-6NP	EXT-6Q	EXT-6QNP

Stainless Steel Whips

- Ultra Durable; *Work-site and Dune Tested*
- 1156 type Light Socket
- 7ft x 1/4 inch Solid Stainless Steel Rod
- Black or Red Rod Sheathing
- Standard Connectors, Threaded Base
- Also available in non-powered version

Shown here with:
DT Series 2-pin Connector
(*Deutsch Connector*)"
Red Rod Sheathing,
optional Green light head
in 1156 socket and optional
FLAG-16-O-XW
(Orange flag w/white X)



Heavy Duty Safety Flags



Standard Flag Colors: Red, Orange, Lime, Green, Blue
Other Colors Available

Windsock and Hardware

Flag-WS18-96 Flag, Flag-WS18-HW (Hardware)



FLAG16-O-XY:
16 x16 inch Safety Flag,
Orange mesh flag with
reflective X in yellow
Part Number Build:
FLAG-16-(flag color)-X (X Color)
Other colors available, as seen below




FLAG-16-L-XW: 16 x16 inch
Lime mesh flag with reflective white X



FLAG-11-O-XW:
This 11.5 x11.5 inch flag
Orange mesh with reflective white X



FLAG-11-O:
11.5 x 11.5 inch flag
Orange mesh flag



Airport Checkered Flag
Flag-APF: 36"x36"
Heavy-duty Nylon Airport Flag


Ask about more flag options!
Standard Colors and Patterns, as well as,
Custom Designs and Sizes



Pennant Flags
12w x 9 h inch flags
FLAG-PO Orange Pennant



FLAG-PL Lime Pennant



Flag-PO-SY Pennant Flag,
Orange Mesh, Yellow 3M Stripe

LED Lights 9-12V and 24 Volt,

All LED lights are break-resistant and feature a twist-in 1156 Type Light Socket


Animated LED Tubes

AL6FX: 6 LED Light Tubes 12V


shown at right and below

BRIGHTEST AVAILABLE WHIP LIGHT


- Strobing LED Light
- Visible Night or Day from Miles Away
- Cross-QuadFlash –
- Strobing Animation
- Break Resistant,
- 100,000 hours,
- Fits 1156 (BA) sockets
- Weather resistant
- Polycarbonate Tubing enclosure
- *Custom color combinations available




AL6FXB
Blue




AL6FXBW
Blue/White



AL6FXAR
Amber/Red




AL6FXRW
Red/White




AL6FXR Red




AL6FXUSA
Red/White/Blue




AL6FXW
White




AL6FXGW
Green/White



AL6FXG
Green



AL6FXAG
Amber/Green




AL6FXA
Amber



AL6FXG
Amber/White



AL8FR
Red



AL8FA
Amber



AL8FB
Blue



AL8FW
White



AL8FG
Green



AL8FUSA
R,W,B,R



AL8FMULTI
Multi
R,G,B,A


Animated LED Tubes

AL8F: 8 LED Light Tubes 12V

shown at left

New! AL16FX 24Volt, 16 LEDs

Animated Light Tubes
Now Available Red or Green
Other colors by request.

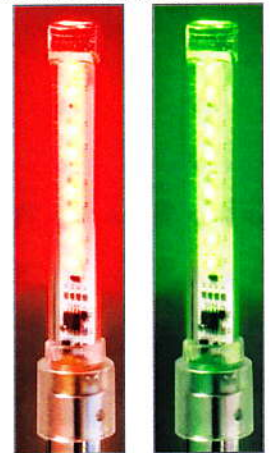

AL2CR
Red
non-flashing



AL2CG
Green
non-flashing



AL2CB
Blue
non-flashing



AL2CA
Amber
non-flashing




AL2CW
White
non-flashing


Super Bright LED Tubes

Extra bright and available in 5 colors, **all non-flashing**. This tough light is completely filled with optically clear silicone for added robustness. 12V *shown at left*


Mine Specification 12V LED Warning Lights, Non-Flashing



AL8CR
Red
(non-flashing)



AL8CAR
Amber, Red
(non-flashing)



AL8CA
Amber
(non-flashing)

AL4CX

360 degree/Bi-directional
Available in amber, (shown at right)
also, red, white, blue & green

AL4CA
Amber
360°
(non-flashing)



Lamp Shields for Automotive Bulbs

12 Volt Automotive Type Bulb, Use in 1156 Socket


ML-TA

ML-TR

ML-TA, ML-TR,
connect around 1156 socket
Heavy Duty Lamp Shields:
High impact plastic to protect
Automotive Type Bulbs on whips.



ML-PLR, ML-PLA,
connect around 1156 socket
Lamp Shields:
High impact plastic
to protect Automotive Type Bulbs
on whips.



ML-CAP:
Optional Metal Cap
for ML Shields
1156 Bulb:
1156 Automotive Bulb
12 Volt 2.1 Amp SC Bayonet

Self-Powered Options



9VOLT BATPACK: Use for a great temporary alternative
to hard-wiring your whip.
An excellent back-up power supply for your
AL8F or AL6F whip-top lights
Expected hour of use:
With AL8F-CLED, 25 to 30 hours
With AL6F LED, 12 to 15 hours



BATPACK-ER KIT: The BatPack-ER Kit, fits an existing 1156
socket whip or use set-screw base. It can also be used as
a temporary Light source
in lieu of wiring.
Includes both base options,
the 3 CR2 3 V batteries,
and AL8F light
(in your choice of color).




Telescoping Whips

Available in 11, 13, 15 and 21 foot lengths, Powered or Non-Powered



TW15-X 15' Telescoping Whip: Heavy Duty Fiberglass, Powered, 3 Locking Sections, Reflective X (16 x 16") Flag.
Whip is constructed of rigid wrapped fiberglass that is safe and non-conductive. Extended lengths to 21'
using three individually locking segments.



BRIGHTEST AVAILABLE WHIP LIGHT AL6FX see on page 5

Also Makes a Great Site Locator Light
Strobing LED Light is Visible Night and Day,
from Miles Away Cross-QuadFlash –
Strobing Animation, Break Resistant, 100,000 hours,
Fits 1156 (BA) sockets Weather resistant: enclosed in Polycarbonate Tubing



Site Locator Pole Light 22 foot length, Non-Powered

CMPPOLE: Pole is constructed of rigid wrapped fiberglass
that is safe and non-conductive.
Extended length 22' using individually locking segments

Mounts



Window Mount
519.320

Shown with optional cigarette cord power adaptor.



519.343

Optional threaded base for the standard threaded pole.



SSQR22

RCA type, Stainless Steel Threaded, Quick-Connects base (left above)
Units should be used with Spring

SSQR21

Single Wire Lead type, Stainless Steel, Quick-Connects base (Shown right above)



Magnet Mount **519.330**
Shown with optional cigarette cord power adaptor.



SPM: Stake Pocket Mount


Attach whip to this mount after slipping it into a truck's post hole and expanding the base.

Heavy Duty Stainless Steel, No drilling needed, a solid fit with adjustable and removeable base plates



519.309 Stainless Steel
519.30B Zinc Plated Steel

Heavy Duty Stainless Steel Spring Mount
Highly recommended to help reduce whip breakage.



Up position



Down position

FDSM: Fold Down Mount

attaches whips to the truck side wall, tool box, or back rack. It provides a quick and efficient way to fold whips down when leaving a job site or passing under low overhangs.



ABM: Angle Bracket Mount

Attach whips to toolbox, rack or truck bed with this heavy duty bracket.




Hitch Mounts, powered

Hitch Mounts are available with either a screw mount for the standard threaded whip, a quick release mount for quick

connect whips or a telescoping adapter for telescoping whips and Breakdown Whips. Order with or without a 107 dB backup alarm. **Specify 2 inch or 1.25 inch receiver.**



HM1: Hitch Mount with Standard Screw Mount

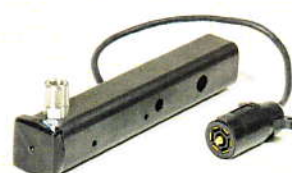

HM1Q: Hitch Mount with Quick-Connect Base



HMT: Hitch Mount for Telescoping Pole



HM1S: Hitch Mount with Standard Screw Spring Mount
**107 db Backup Alarm available*



HM1A: Hitch Mount with Standard Screw Mount and 107 dB Backup Alarm



HM1QA: Hitch Mount with Quick-Connect Base and 107 dB Backup Alarm



HMTA: Hitch Mount for Telescoping Pole with 107 dB Backup Alarm